



Kalrez® Spectrum™ perfluoroelastomer parts

A Product of DuPont Dow Elastomers

Kalrez® Spectrum™ 7075

Introduction

Kalrez® perfluoroelastomer parts have been the material of choice for mechanical seals, valves and other demanding chemical and hydrocarbon processing applications for over 25 years. Today, mechanical seals are becoming smaller and lighter, yet are required to perform just as efficiently as larger mechanical seals. This puts additional demands on elastomeric O-rings as their cross section decreases to accommodate the smaller design. Smaller O-rings are more prone to compression set which can reduce their functional effectiveness, and therefore reduce the operability of the mechanical seal.

With more expected from mechanical seals and their sealing components, DuPont Dow has developed a new product with improved sealing properties. Kalrez® Spectrum™ 7075 expands on the capabilities of Kalrez® 4079 by offering much lower compression set, increased seal force retention, broader chemical resistance and higher temperature stability. Kalrez® Spectrum™ 7075 is the newest developmental product from DuPont Dow Elastomers to meet the demanding requirements in new mechanical seal applications.

Kalrez® Spectrum™ 7075

Kalrez® Spectrum™ 7075 joins the family of Kalrez® Spectrum™ products designed specifically for the needs of the chemical processing industry. Compound 7075 broadens the family of Spectrum™ sealing options with a compound that has enhanced physical

performance properties including very low compression set (*Figure 1*) and improved seal force retention (*Figure 2*). To provide even greater sealing performance in dynamic applications where low friction is required, 7075 O-rings have a glossier finish than other Kalrez® parts.

Kalrez® Spectrum™ 7075 is designed for general-purpose use as an O-ring or custom-sealing component in the chemical and hydrocarbon processing industries. It is a carbon-black filled compound with mechanical properties designed for improving sealing performance in temperature cycling applications. 7075 has improved thermal resistance that extends maximum service temperature to 327°C. It is recommended that in each application the chemicals, service temperature and pressure be reviewed for the optimal compound selection.

Typical Physical Properties¹

Hardness, Shore A ± 5 (range 70–80 Shore A)	75
100% Modulus ² , MPa (psi)	7.6 (1100)
Tensile at break, MPa (psi)	17.9 (2600)
Elongation at Break, %	160
Compression Set, %	
70 hr at 204°C (400°F) ³	15
70 hr at 204°C (400°F) ⁴	12
Maximum Service Temperature, °C (°F)	327 (620)
Lower Service Temperature, °C (°F)	-20 (-4)

¹ Not to be used for specifications

² ASTM D412, 500 mm/min

³ ASTM D395B, O-rings

⁴ ASTM D345B, pellets

Figure 1. Compression Set at 204°C


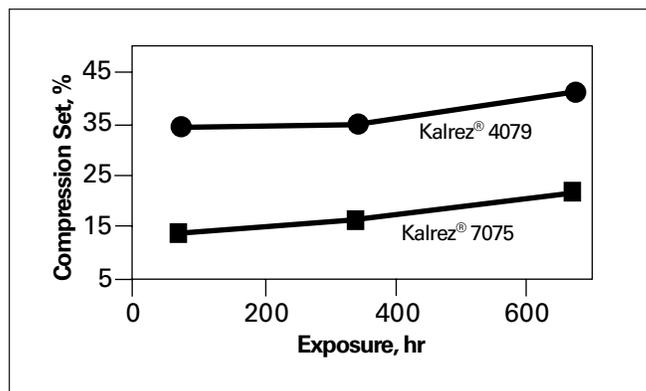


Figure 2. Seal Force Retention at 200°C*

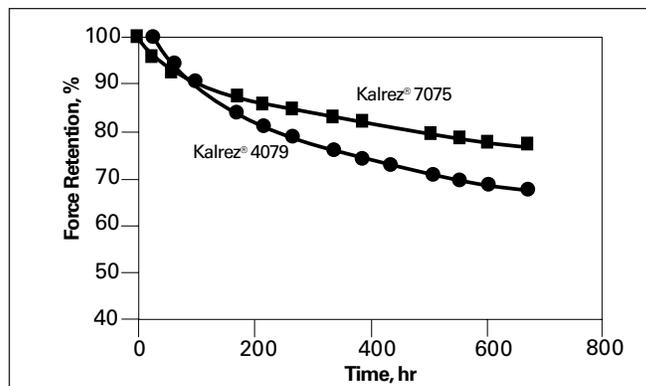

*ISO 3384: 1991, Method A, 214 O-ring

Thermal, Chemical, and Mechanical Performance

Kalrez® Spectrum™ 7075 offers very low compression set (*Figure 1*) as measured by ASTM (American Society of Test Methods) D395 (for O-rings) to predict heat resistance. DuPont Dow and Kalrez® compression set testing extends the standard ASTM 70 hr protocol to include 336 and 672-hr compression set testing, which better predicts long-term O-ring performance. Kalrez® 4079, the standard in the sealing industry for severe service, now has a sister compound with nearly 50% less compression set. Less compression set results in improved sealing and longer service life. This feature augments the requirements of the sealing industry as smaller and lighter mechanical seals with reduced spring force tension dominant in the market.

Kalrez® Spectrum™ 7075 offers the enhanced elastomeric properties outlined above while providing chemical resistance better than the industry standard set by Kalrez® 4079.

The seal force retention (*Figure 2*) of Kalrez® Spectrum™ 7075 is about 10% improved over Kalrez® 4079. Improved seal force retention equates to better elastomeric properties at service temperature and pressure leading to reliable, long-term mechanical seal performance.

**Table 2
Chemical Resistance**

Compound	Kalrez® 7075	Kalrez® 4079	Kalrez® 6375
<i>Chemical Resistance to:</i>			
Aromatic/Aliphatic Oils	++++	++++	++++
Acids	++++	++++	++++
Bases	+++	+++	++++
Alcohols	++++	++++	++++
Aldehydes	++++	+++	++++
Amines	++	+	++++
Ethers	++++	++++	++++
Esters	++++	++++	++++
Ketones	++++	++++	++++
Steam/Hot Water	++	+	++++
Strong Oxidizers	++	++	++
Ethylene Oxide	+++	+	++++
Hot Air	++++	++++	+++

++++ = Excellent +++ = Very Good
++ = Good + = Fair

For further information on Kalrez® or other elastomers please contact one of the addresses below, or visit us at our website at www.dupont-dow.com

Global Headquarters

DuPont Dow Elastomers L.L.C.
300 Bellevue Parkway, Suite 300
Wilmington, DE 19809 USA
Tel. 800-853-5515
302-792-4000
Fax. 302-792-4450

European Regional Headquarters

DuPont Dow Elastomers S.A.
2, chemin du Pavillon
CH-1218 Le Grand-Saconnex
Geneva, Switzerland
Tel. +41-22-717-4000
Fax. +41-22-717-4001

Asia Pacific Regional Headquarters

DuPont Dow Elastomers Pte Ltd.
1 Maritime Square #10-54
HarbourFront Centre
Singapore 099253
Tel. +65-6275-9383
Fax. +65-6275-9395

South & Central America Headquarters

DuPont Dow Elastomers Ltda.
Alameda Itapecuru, 506 - Sala 12
Alphaville - Barueri - SP
CEP06454-080
Brasil
Tel. +55-11-4166-8978
Fax. +55-11-4166-8989

Kalrez® Parts Marketing

DuPont Dow Elastomers L.L.C.
1 Innovation Way
Newark, DE 19714 USA
Tel. 800-323-9806
Fax. 302-733-8858

Kalrez® European Parts Marketing

DuPont Dow Elastomers N.V.
Battelsesteenweg 455d
B-2800 Mechelen, Belgium
Tel. +32 15 28 87 00
Fax. +32 15 28 87 50

Kalrez® Asia Parts Marketing

DuPont Dow Elastomers Limited
Dempa Bldg., 3F, 11-15
Higashi Gotanda 1-chome
Shinagawa-ku
Tokyo, Japan 141-0022
Tel. +81-3-3444-5166
Fax. +81-3-3444-6095

The information set forth herein is furnished free of charge and is based on technical data that DuPont Dow Elastomers believes to be reliable. It is intended for use by persons having technical skill, at their own discretion and risk. Handling precaution information is given with the understanding that those using it will satisfy themselves that their particular conditions of use present no health hazards. Since conditions of product use and disposal are outside our control, we make no warranties, express or implied, and assume no liability in connection with any use of this information. As with any material, evaluation of any compound under end-use conditions prior to specification is essential. Nothing herein is to be taken as a license to operate under or a recommendation to infringe on any patents. While the information presented here is accurate at the time of publication, specifications can change. Please check www.dupont-dow.com for the most up-to-date information.

CAUTION: Do not use in medical applications involving permanent implantation in the human body. For other medical applications, discuss with your DuPont Dow Elastomers customer service representative and read Medical Caution Statement, H-69237.

Kalrez® is a registered trademark of DuPont Dow Elastomers.

Kalrez® Spectrum™ is a trademark of DuPont Dow Elastomers.

Copyright © 2001, 2002, 2003 DuPont Dow Elastomers. All Rights Reserved.

